


LMH3S-3000TRA & LMH3S-3000MM



TWO POST LIFTS

Features include: THE WORLD'S FASTEST LIFT - UP IN 20 SECONDS DOWN IN 14

- Triple reach front arms as standard
- 3000 Kg lifting capacity
- Triple safety: Two redundant hydraulic circuits plus Automatic safety latch providing quiet operation
- Twin hydraulic rams on each post using a unique master and slave cylinder and powerful oil submerged motor configuration provides smooth and fast lifting and lowering times
- Synchronising cables are not required as the hydraulic system ensures fast and safe synchronisation at any level
- Self bleeding hydraulic system
- Low lifting point from 95mm (75mm with MM arms)
- Asymmetric arms for maximum door clearance
- Ergonomic design control lever
- The lifting height can be very precisely adjusted
- 5 year comprehensive warranty
- Single Phase electrics available
- Available in blue (RAL 5002) or grey (RAL 7016)

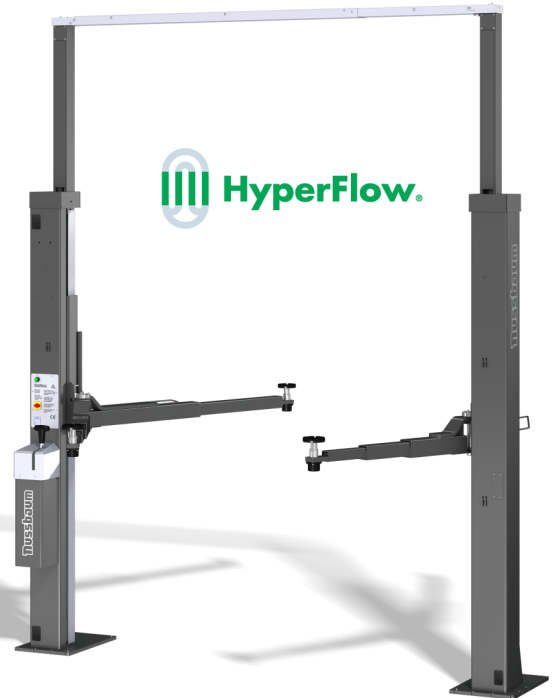

Options:

- Mini Max Lifting Arms (MM)



- * Easy access for vehicles with side skirts
- * Height adjustable lifting pads
- * Enormous adjustable range
- * Multi level adjustment through pedals
- * Reliable Positioning



Control Box
Progressive lowering and lifting speed



- Height Adapters

- * Adjustable height adapter (160mm-240mm)
- * Sold as set of 4
- * To facilitate lifting 4 x 4's and vans



MODEL	LMH3S-3000TRA	LMH3S-3000MM
Lifting Capacity (Kg)	3000	3000
Lifting/Lowering Time Approx (secs)	20/14	20/14
Lifting Height (mm)	2040	2040
Min Ceiling Height Required (mm)	4200	4200
Lowest Lifting Point (mm)	95-140	75-185
Overall Height (mm)	4040	4040
Overall Width (mm)	3000-3300	3100-3300
Drive Through Width (mm)	2560-2760	2560-2760
Distance Between Posts (mm)	2560-2760	2560-2760
Long arm extensions (mm)	940-1495	1000-1480
Short arm extension (mm)	470-870	600-980
Motor (Kw)	3	3
Power Supply V/Hz)	400/50	400/50

